

## OPEN BORE - 13.50 $\pm$ 0.25 MM

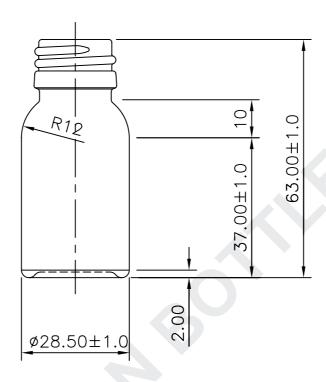



## ALL DIMENSIONS ARE IN MILLIMETERS

									ALL	ווט	VI L I	1310113 AIL III	MITELIME	151/2
PROCESS	BLOW &	BLOW										SPECIFICATION AGREEMENT ARE BAS DO NOT SC	ED ON TOLERANCED ALE DRAWING	DIMENSIONS ONLY
MINIMUM THROUGH BORE											COPYRIGHT RESERVED. NOT TO BE WRITTEN PE	COPIED IN WHOLE OF RMISSION FROM H.N.		
FILL POINT VERIF	FIED	NO										HINDUSTHAN N	ATIONAL	GLASS
TILT ANGLE		-		No.	REF.No.		REVISION		DATE	снк	DRC	& IN	D. LTD.	
MAXIMUM DEPTH OF STANDARD ENGRAVING -		-	FILL-POINT			ml ± - ml			TITLE 18 ML. AMBER ROUND					
MAX. GAS VOLUMES -		-	BRIMFUL CAP.			19.0 ml ± 1.0 ml					CUST:	APPROVED:		
REF DRG No :- W/AMB/R/136 WEIG				IGHT	GHT 35 Gms. ± 4 Gms.							TRACED: VIMLESH 05.02.03 CHECKED:		
MOULD EQUIPMENT ORDERED BY			FINISH		22 MM. R.S.P.P. STD.		COLOUR	≀ FL	TNI.	SCALE DRAWING	No. 4017	6 REV		
PLANT B			SURFACE TREATM			TMENT	IENT NO		C.C. NO	. 401	36	SCALE DRAWING I	10. 4013	36