

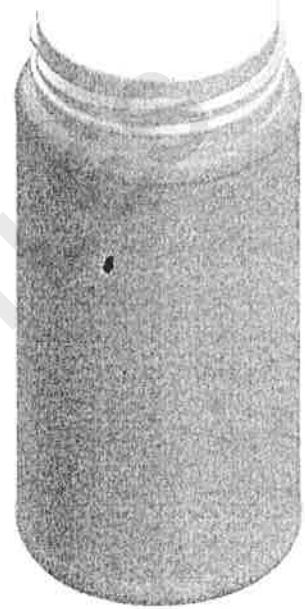


A: T 1.20mm

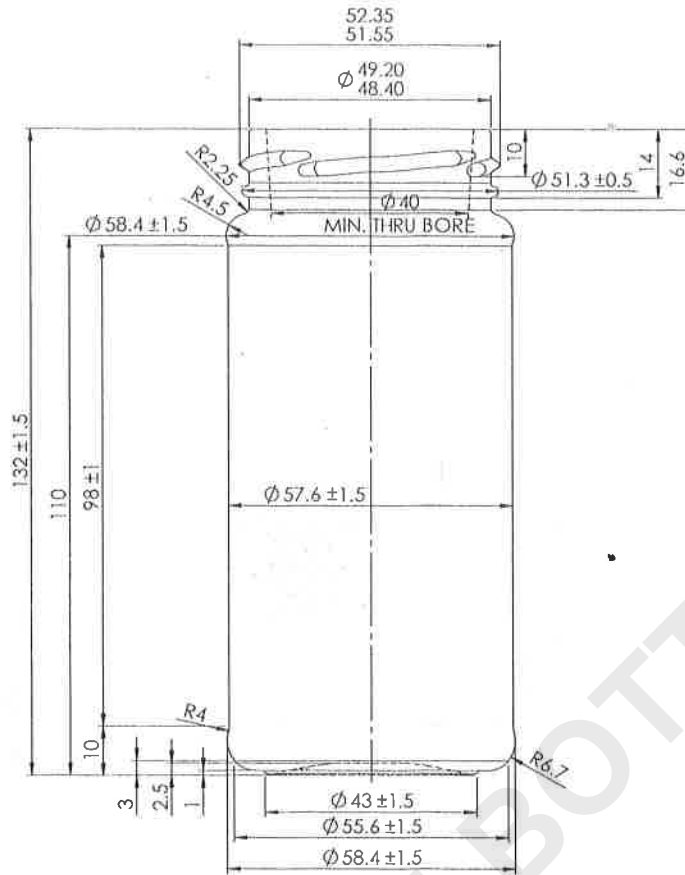

FRONT VIEW

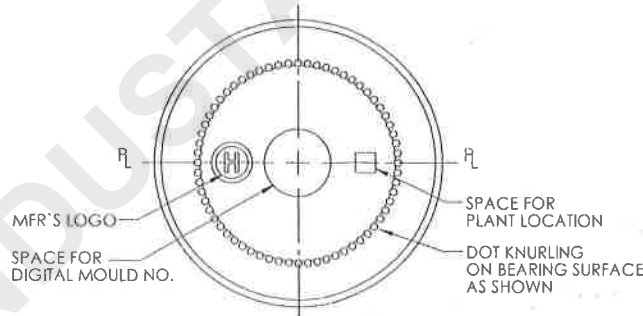

BOTTOM VIEW



NOTE : ALL ENGRAVING & KNURLING APPROX. 0.4 mm RAISED

PROCESS	P & B	REV. NO.	REV. BY	REVISION	DATE	CHK	DRC
MINIMUM THROUGH BORE							
FILL POINT VERIFIED							
TILT ANGLE	17.5°						
MAXIMUM DEPTH OF STANDARD ENGRAVING	0.4	FILL-POINT		--- ± ---			
MAX. GAS VOLUMES		BRIMFUL CAP.		255 ± 6 ml			
REF DRG No : W1-01926-B		WEIGHT		175 ± 10 gms			
MOULD EQUIPMENT ORDERED BY	FINISH			53 mm LUG FINISH WITH RING	COLOUR	FLINT	
PLANT	SINNAR			SURFACE TREATMENT	C.C. NO.:	HNG-00897	
SPECIFICATION AGREEMENT ARE BASED ON TOLERANCED DIMENSIONS ONLY DO NOT SCALE DRAWING COPYRIGHT RESERVED NOT TO BE COPIED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION FROM H.N.G. & I. LTD. HINDUSTHAN NATIONAL GLASS & IND. LTD. CUSTOMER : CAPITAL FOODS DKN : PRASHANT S. DR. DT. : 28/12/2014 CHK. : KS CHK. DT. APPD. APPD. DT.							
DRAWING No.:							A3 REV.
							HNG-00897